

江西明阳玻纤有限公司

Jiangxi Ming Yang Glass Fiber Co., Ltd.

地址：中国江西省赣州市南康区龙岭工业园西区 341400

Add: West Longling Industrial Zone, Nankang Dist,  
Ganzhou City, Jiangxi 341400, China.

Tel/Fax: +86-797-6566298

Website: [www.jxmygf.com](http://www.jxmygf.com) [www.fibermeshtape.com](http://www.fibermeshtape.com)



微信扫码, 在线参观工厂  
Scan via WeChat to  
visit factory online

国内销售部

联系人: 温经理

手机: 186 8890 9089

邮箱: [wenling@jxmygf.com](mailto:wenling@jxmygf.com)



Overseas Sales Department

Contact: Grace Xu

Phone/WhatsApp/WeChat: +86-13133762113


Email: [grace@jxmygf.com](mailto:grace@jxmygf.com)



**明阳玻纤**  
MING YANG GLASS FIBER

SINCE 2001

华源集团  
Huayuan Group

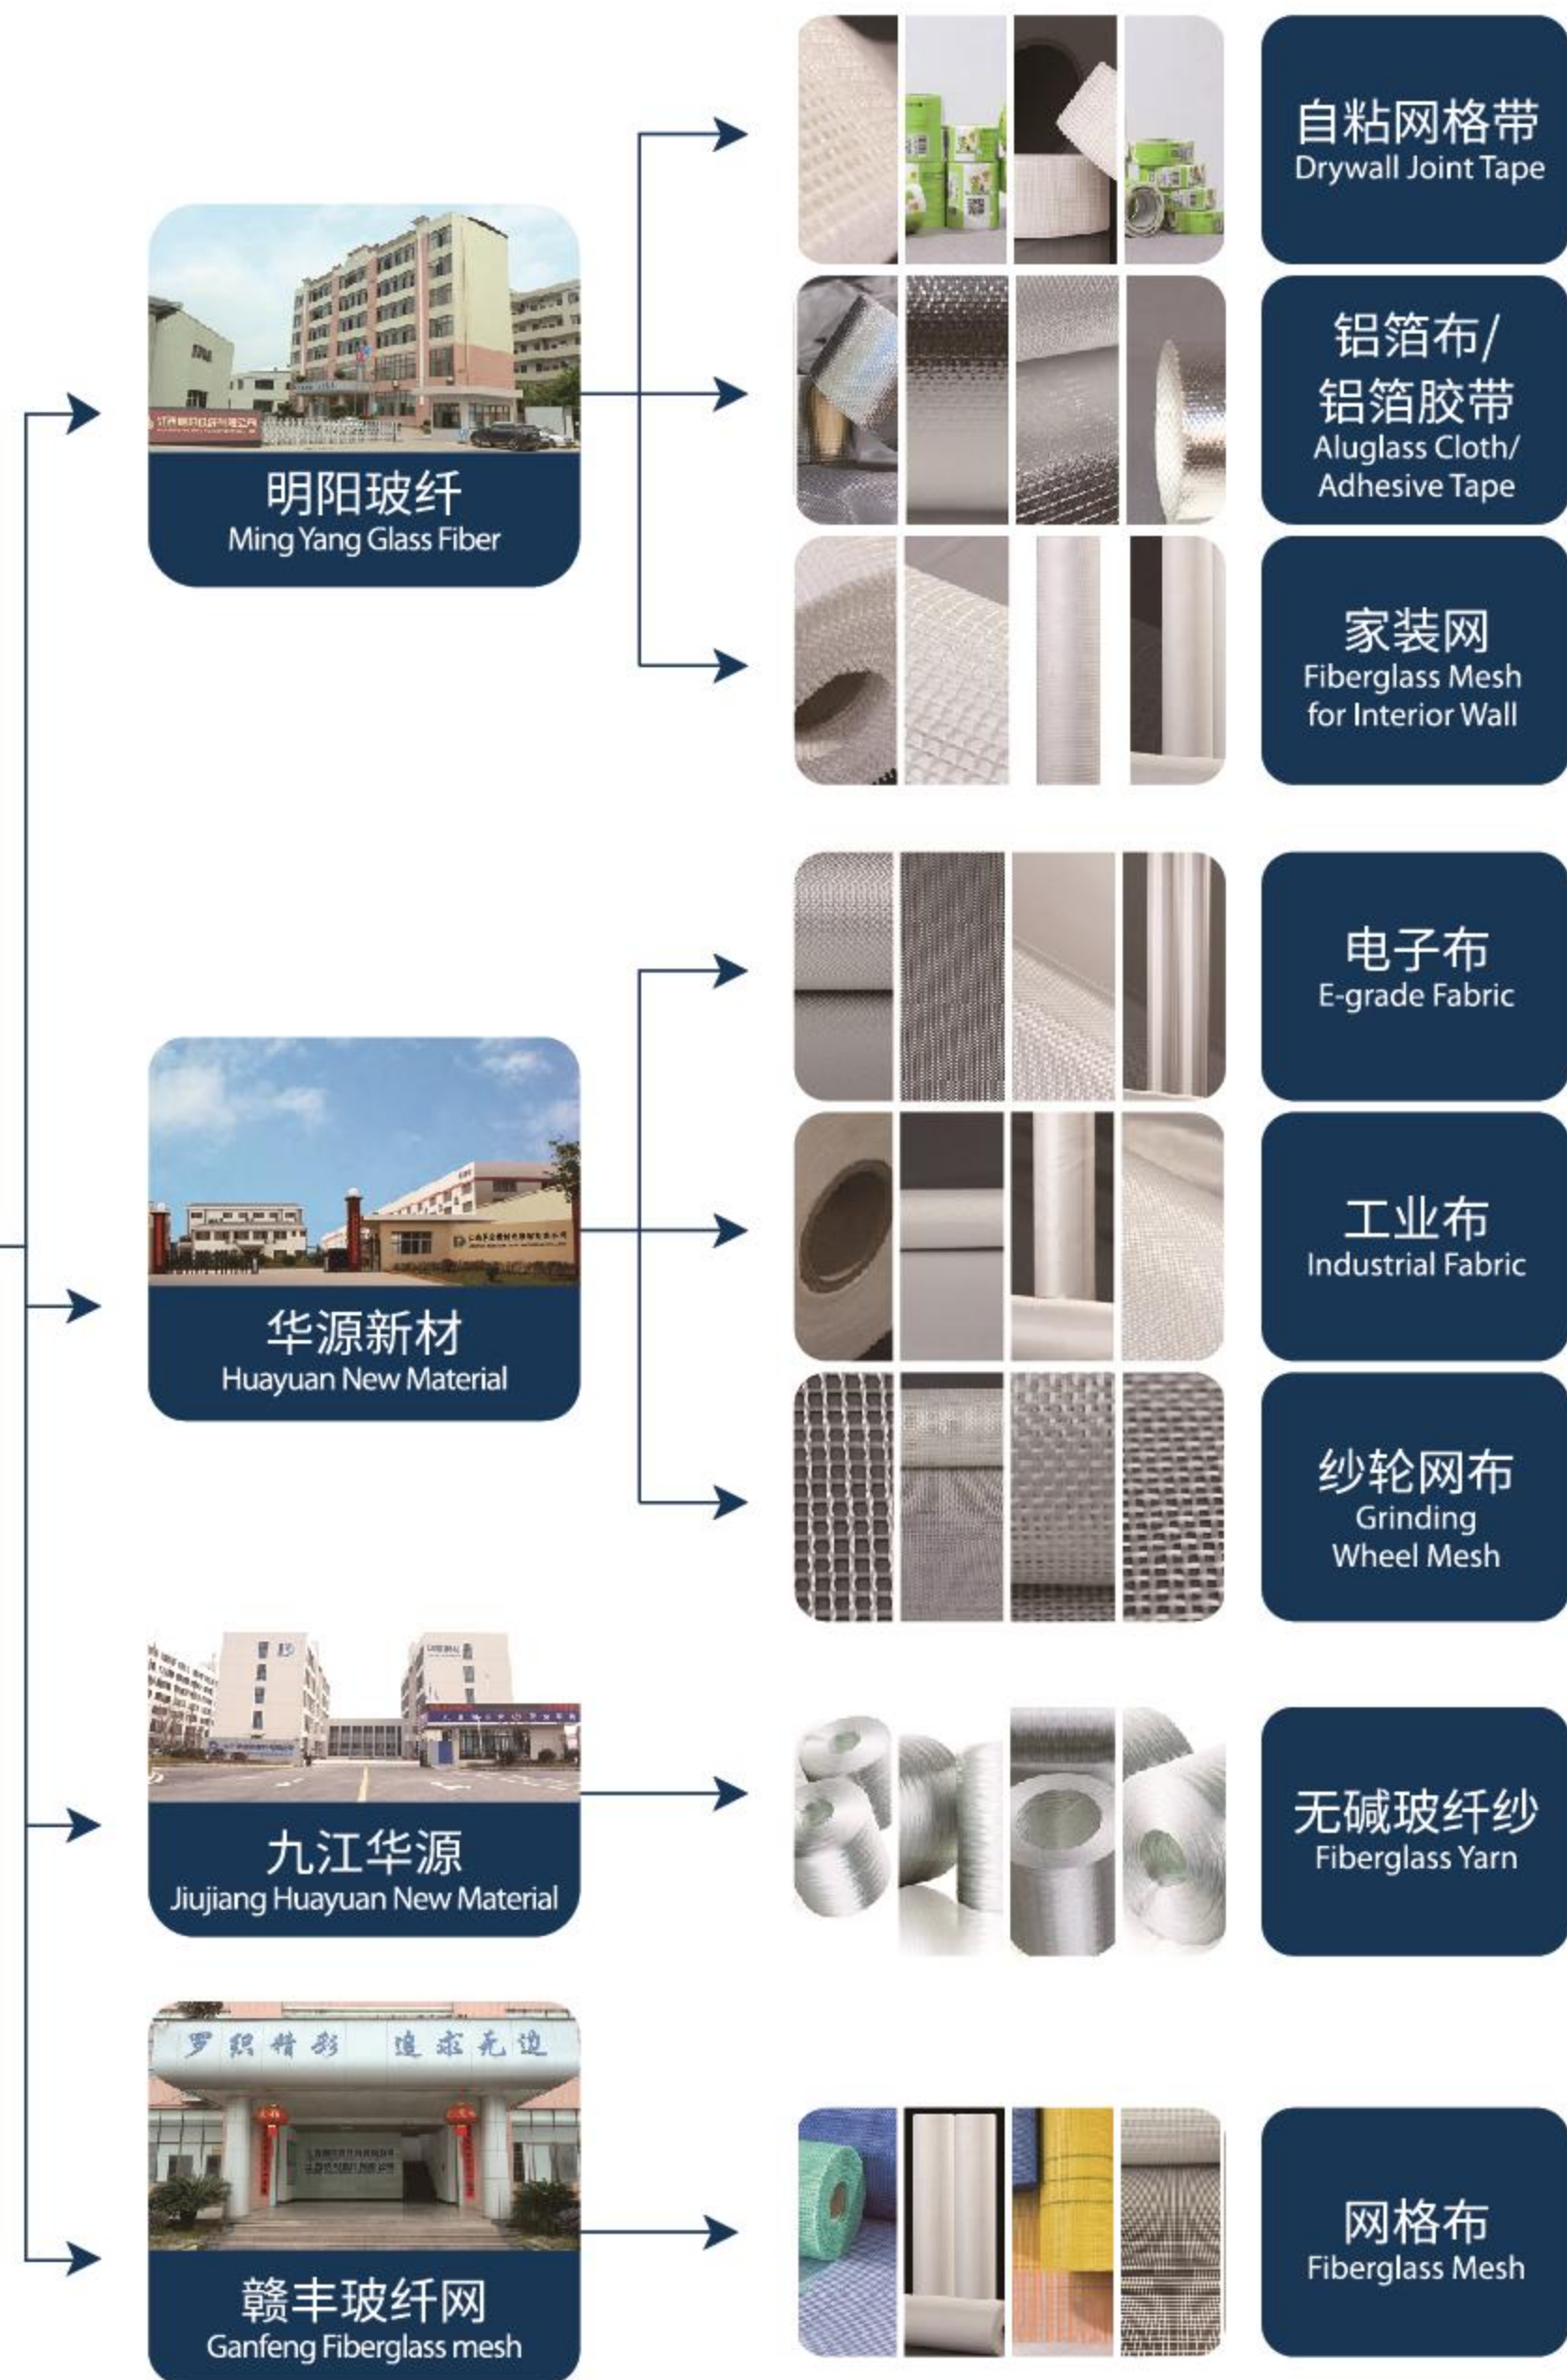

## 公司介绍 / ABOUT US


江西明阳玻纤有限公司经过二十多年的稳健经营,现已经成为中国规模较大的玻纤及复合材料生产厂家。公司于2007年通过ISO9001质量管理体系认证。2008年成为南康首家实现自主出口的本地生产企业。公司建立了完善的销售网络,产品销往国内各主要省市,并且出口到全球各地。公司的“壁虎哥”品牌家装网和自粘带深受市场的欢迎,成为国内众多装修建材的首选品牌。2015年,公司导入精益生产体系,让产品质量和工厂管理再上一个台阶,以便更好地服务客户。明阳玻纤秉承“诚信稳健,共创共享”的经营理念,真诚期待与您的合作。

Jiangxi Ming Yang Glass Fiber Co.,Ltd was founded in 2001. After more than 20 year's stable development, it has become a big scale manufacturer of fiberglass and aluminum foil glass cloth composite materials in China. The company passed the ISO9001 quality management system certification in 2007. In 2008, it became the first local production enterprise in Nankang and achieved independent export right. The company has established a complete sales network in domestic market and all over the world. The company's "GeckoBro" brand is very popular in the domestic market and become the first choice for home decoration and construction materials. In 2015, the company introduced a lean production system to bring product quality and factory management to a new level in order to better serve customers. The company always adhere to the business principle of "Integrity & Steady, Create & Share" and sincerely expect long cooperation with customers from all over the world!



江西明阳玻纤有限公司  
JIANGXI MINGYANG GLASS FIBER CO., LTD.

# 证书展示 / CERTIFICATES DISPLAY

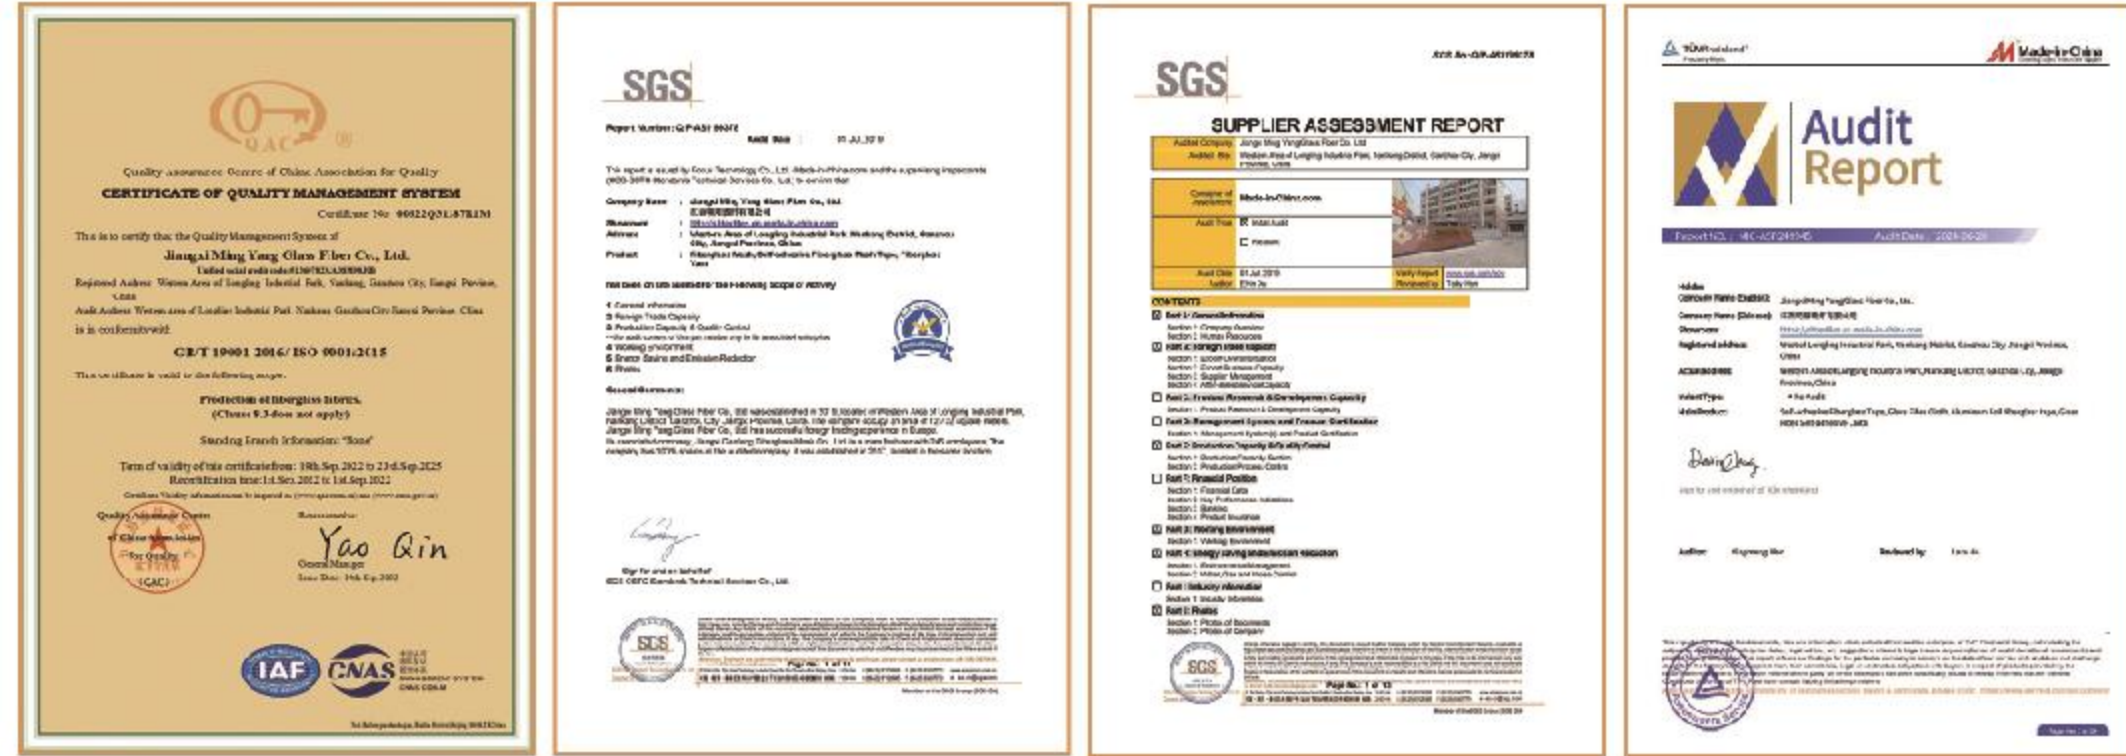

# 主要设备 / MAIN EQUIPMENTS



复合车间  
laminating workshop

复合车间  
laminating workshop

复合车间  
laminating workshop



复合车间  
laminating workshop



织布车间  
weaving workshop



涂覆上胶车间  
coating workshop



分切车间  
Slitting workshop



包装车间  
Packing workshop



仓库  
warehouse

# 铝箔玻纤布 Aluminum Foil Glass Cloth


## 产品介绍:

铝箔布是由铝箔同玻纤布及胶水复合而成。选用特种阻燃型粘合剂复合后形成致密薄膜,具有复合后的铝箔表面光滑平整,光反射率高,纵横向抗拉强度大,不透气,不透水,密封性能好。具有高遮蔽率、材料韧性强、价格低等特性。

## Introduction:


Foil-glass cloth is composed of aluminum foil, glass fiber cloth and glue. After laminating with special flame-retardant adhesive, a dense film is formed. The surface of the composited aluminum foil is smooth and flat, with high light reflectivity, high longitudinal and transverse tensile strength, airtight, watertight, and good sealing performance. It has the characteristics of high shielding rate, strong material toughness and low price.

## 产品应用 Applications

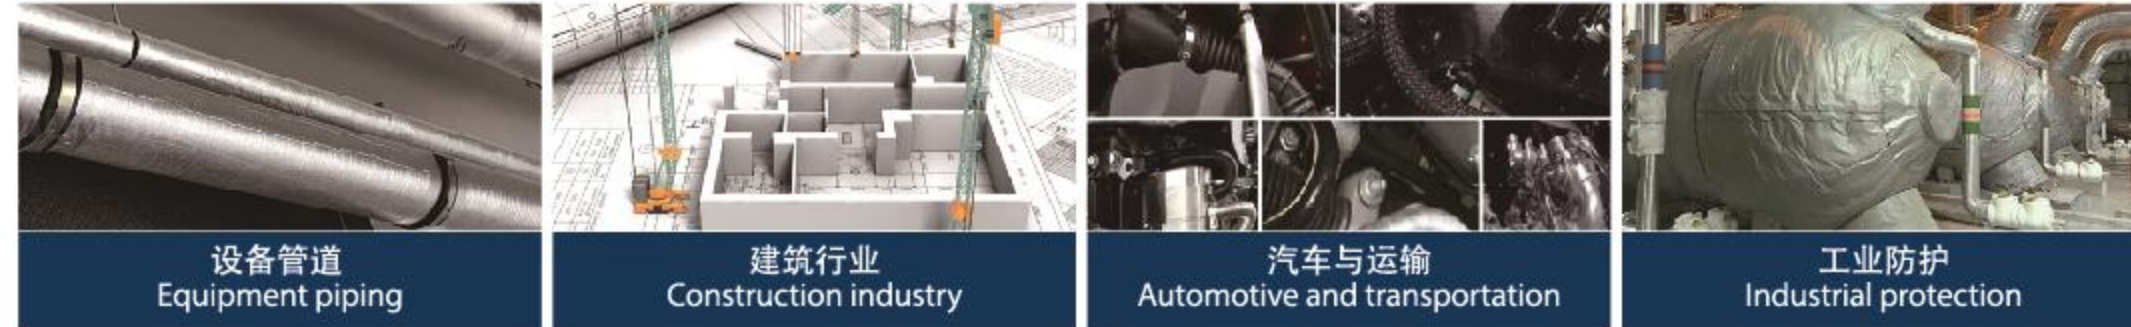

## 规格和参数:

型号 Item No.	AGC85	AGC110	AGC200	AGC440
克重 Weight	85±5g/m <sup>2</sup>	110±5g/m <sup>2</sup>	200±5g/m <sup>2</sup>	440±5g/m <sup>2</sup>
坯布克重 Glass Cloth Weight	65g/m <sup>2</sup>	85g/m <sup>2</sup>	180g/m <sup>2</sup>	420g/m <sup>2</sup>
铝箔规格 Thickness of Aluminum foil	7um / 9um / 14um / 18um / 25um / 38um / 50um			
胶水品种 Glue	水胶 (丙烯酸酯) / 油胶 (聚氨酯) Water Glue (Acrylate)/Oil Glue (Polyurethane)			
密度 100mm/根 Density /100mm	8×5	12×8	9×8	17×13
抗拉强度 25mm Tensile strength N/25mm	>100N	>230N	>500N	>1950N
18°C耐低温测试 18°C low temperature resistance test	无分层脱壳 No delamination			
注: 以上是常规品种, 可根据客户不同的要求定制 Remarks: The above are our regular products. More specifications can be customized.				

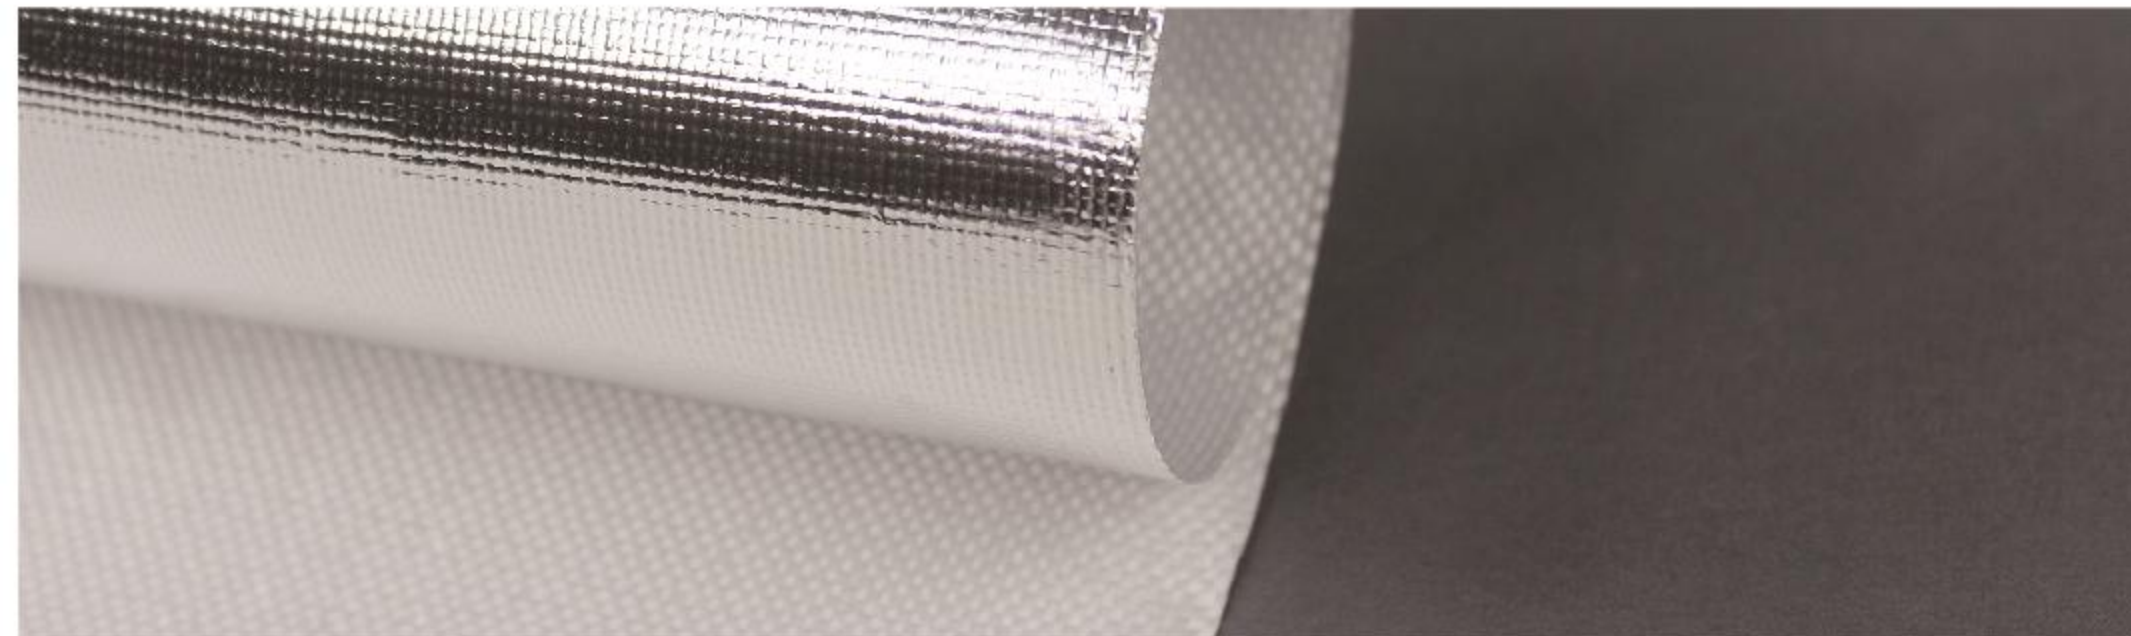

# 铝箔玻纤布胶带 Aluminum Glass Cloth Tape

## 产品介绍:

铝箔玻纤布胶带是由铝箔和玻璃纤维布经特殊工艺复合在一起形成的一种新型保温隔热材料。具有出色的水汽阻隔性能,极高的机械强度和抗氧化性能,内聚力强,抗腐蚀,耐弱酸碱。适用于管道封闭的拼接,暖通空调风管,冷暖水管的绝热和水汽阻隔,尤其是船舶行业的管道密封。

## Introduction:

Aluminum foil glass cloth tape is a new type of thermal insulation material formed by compounding aluminum foil and glass fiber cloth through a special process. It has excellent water vapor barrier performance, extremely high mechanical strength and oxidation resistance, strong cohesion, corrosion resistance, and weak acid and alkali resistance. It is suitable for the splicing of pipe closures, the heat insulation and water vapor barrier of HVAC air pipes, cold and warm water pipes, especially the pipe sealing in the shipbuilding industry.

## 规格和参数:

型号 Item No.	AGCT190	AGCT200	AGCT210	AGCT225	AGCT305
成品克重 Weight	190g±5g/m <sup>2</sup>	200g±5g/m <sup>2</sup>	210g±5g/m <sup>2</sup>	225g±5g/m <sup>2</sup>	305g±5g/m <sup>2</sup>
坯布克重 Glass cloth weight	65g	75g	85g	100g/m <sup>2</sup>	180g
离型纸克重 Release Paper weight	65g/70g/75g/80g/90g				
干胶定量 Dry glue basic weight	40g/m <sup>2</sup>				
铝箔厚度 Thickness of Aluminum foil	7um/18um				
胶水品种 Glue	水胶 (丙烯酸酯) / 油胶 (聚氨酯) Water Glue (Acrylate)/Oil Glue (Polyurethane)				
剥离率 Peel rate	N/25mm ≥ 11N				
初粘性 Initial viscosity	19#				
持粘性 Persistent stickiness	24h				
耐温性 Temperature resistance	-30-120 °C				
施工温度 Construction temperature	10-40 °C				
注: 以上是常规品种, 可根据客户不同的要求定制 Remarks: The above are our regular products. More specifications can be customized.					



# 铝箔胶带

## Aluminum Foil Tape

### 产品介绍:

铝箔胶带,采用优质压敏胶,粘性好,附着力强,抗老化等功效。保温性能大大提高,规格有(12um-80um)各种宽度和长度。铝箔胶带配合所有铝箔复合材料的接缝粘贴,保温钉穿刺处的密封以及破损处的修复。是冰箱、冰柜生产厂的主要原辅材料,也是保温材料经销部门必购原料。广泛应用于冰箱、空调、汽车、石化、桥梁、装修、电子等行业。

### Introduction:

Aluminum foil tape, using high-quality pressure-sensitive adhesive, good viscosity, strong adhesion, anti-aging and other effects. The thermal insulation performance is greatly improved, and the specifications are (12um-80um) in various widths and lengths. Aluminum foil tape is used for joint bonding of all aluminum foil composite materials, sealing of punctured parts of insulation nails and repair of damaged parts. It is the main raw and auxiliary material for refrigerator and freezer manufacturers, and it is also a must-buy raw material for thermal insulation material distribution departments. Widely used in refrigerators, air conditioners, automobiles, petrochemicals, bridges, decoration, electronics and other industries.



### 特点与用途:

铝箔胶带品种多,可满足各个层次性能需求,纯铝胶带抗拉强度高,耐水、耐腐蚀性能好,能牢固粘贴各种不规则表面,为各种保温棉板、管及风管等提供配套,保证其保温性及水汽密闭性。

适用于所有铝箔复合材料的接缝粘贴,保温钉穿刺处的密封以及破损处的修复;各种保温棉板、管及风管等的保温及水汽密闭;冰箱、冰柜等家电产品金属管的粘贴固定。

### Specifications & purpose:

There are many kinds of aluminum foil tapes, which can meet the performance requirements of all levels. Pure aluminum tapes have high tensile strength, good water resistance and corrosion resistance, and can firmly adhere to various irregular surfaces to ensure its thermal insulation and water vapor tightness.

It is suitable for the joint paste of all aluminum foil composite materials, the sealing of the punctured part of the insulation nail and the repair of the damaged part; the heat preservation and water vapor sealing of various insulation cotton boards, pipes and air ducts; the paste of metal pipes of refrigerators, freezers and other household appliances fixed.

### 规格和参数


型号 Item No.	铝箔厚度 Thickness of Aluminum Foil	胶水厚度 Glue Thickness	胶水类型 Glue	适用温度 Applicable Temperature
AFT1340	13um	28um	水胶water-based acrylic adhesive	-30~120°C
AFT1340	13um	28um	热熔胶synthetic rubber adhesive	-30~120°C
AFT1644	16um	30um	水胶 water-based acrylic adhesive	-30~120°C
AFT1850	18um	32um	水胶water-based acrylic adhesive	-30~120°C
AFT1850E	18um	32um	热熔胶synthetic rubber adhesive	-30~120°C
AFT1850	18um	32um	环保胶eco. adhesive	-30~120°C
AFT2260	22um	38um	水胶water-based acrylic adhesive	-30~120°C
AFT2664	26um	38um	水胶water-based acrylic adhesive	-30~120°C
AFT2866	28um	38um	水胶water-based acrylic adhesive	-30~120°C
AFT3574	35um	38um	水胶water-based acrylic adhesive	-30~120°C
AFT4886	48um	38um	水胶water-based acrylic adhesive	-30~120°C
AFT95133	95um	38um	水胶water-based acrylic adhesive	-30~120°C

注: 以上是常规品种, 可根据客户不同的要求定制

Remarks: The above are our regular products. More specifications can be customized.

# 彩色玻纤布系列

## Colorful Glass Cloth Series

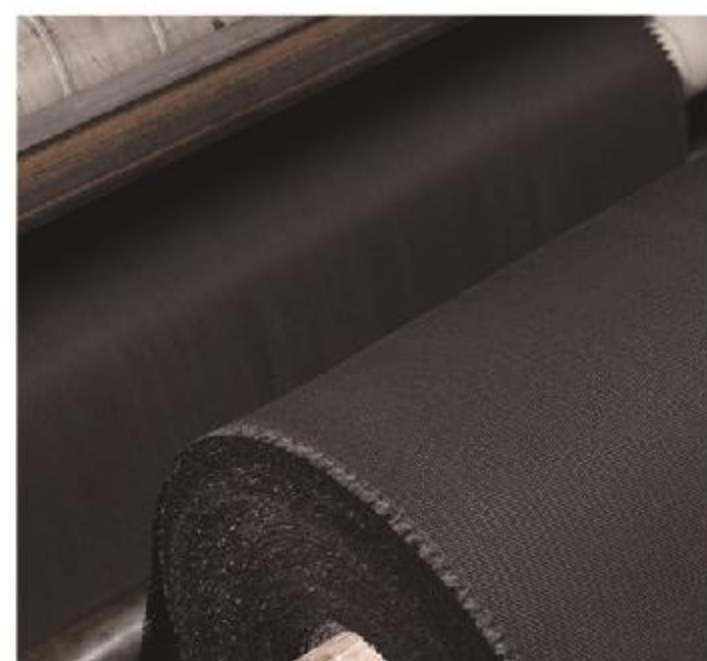

### 产品介绍:

电子级玻璃纤维纱 (E-GLASSFIBER), 以平纹组织织造而成。具有电绝缘性能好、防火阻燃、防水、耐老化、耐候性、高强度、高模量等特点。

### 产品特点:

阻燃、耐火、耐磨、颜色多、易于缝制。

### 产品应用:

防火用途、吊顶空间、吸声隔音、工程装饰等其他防火系统。

### Introduction:

Electronic grade glass fiber yarn (E-GLASSFIBER), woven with plain weave. It has the characteristics of good electrical insulation performance, fire retardant, waterproof, aging resistance, weather resistance, high strength and high modulus.

### Features:

Flame retardant, fire-resistant, wear-resistant, many colors, easy to sew.

### Applications:

Fire protection, ceiling space, sound absorption and sound insulation, engineering decoration and other fire protection systems.



#1 咖啡色 Coffee



#2 蓝色 Blue



#3 黑色 Black



#4 黄色 Yellow



#5 绿色 Green



#6 红色 Red



#7 灰色 Gray



#8 驼色 Camel



#9 紫色 Purple

# 自粘带母卷

## Fiberglass Mesh Tape Jumbo Roll

### 产品介绍:

自粘带母卷即涂覆好的大卷网格带, 一般长度在900米以上。您只需要一台分条机, 即可以直接加工成您想要的任何尺寸, 使您能够快速响应客户的要求。

### Introduction:

Fiberglass Mesh Tape Jumbo Roll is the big roll of coated adhesive mesh, usually with roll length of 900m or more. All you need is to invest on a slitter, and you can get any roll size that you want, which enables you to respond to your clients' demand rapidly.

### 规格表:

幅宽(Roll width)	1220mm, 1010mm
卷长(Roll length)	900m or more
颜色(Color)	White



# 自粘网格带(接缝带)

## Self-adhesive Fiberglass Mesh Tape Drywall Joint Tape

### 产品介绍:

自粘网格带(也称接缝带)以玻纤网格布为基材,经不干胶乳液复合而成,该产品具有优良的自粘性,服帖性优越,空间稳定性强,是建筑业防止墙体及吊顶裂缝和石膏板接缝增强的理想材料。玻纤带与市场大量使用的纸带相比,施工简单,不需涂胶可直接贴在墙面上,强度好达到400N/50mm以上才能拉断(强度好说明抗裂缝强),有网孔透气好,不起泡沫,使用寿命长,玻璃纤维是无机产品,不会像纸一样出现时间长霉变和强度差3-5年后就开裂的现象。此外,施工时不需要预先涂底,使用快捷,施工简便。

### 产品特点:

该产品具有优良的自粘性,服帖性优越,空间稳定性强,施工简单,强度高,透气好,不起泡沫,使用寿命长,防霉变。

### 产品应用:

石膏板接缝,裂缝修补。

### Introduction

Self-adhesive fiberglass mesh tape (also called drywall joint tape) is made of fiberglass mesh that is coated with adhesive latex. It's the most ideal material for cracks repairing on the drywall, and joints strengthening on the ceilings, gypsum boards, etc. Comparing to the paper tape which is widely used on the market, it's much easier to use, no bubbles or blisters, and can be applied directly to the wall surface without pre-embedding required. Its tensile strength is up to 400N/50mm which is much stronger than paper tape. Furthermore, it's non-organic, mold-resistant, long durability, which prevents the possible break that happens to paper tape after 3-5 years.

### 技术参数表 Technical Data Sheet

网眼	Mesh size	8x8/inch	9x9/inch	9x9/inch	8x8/inch
克重	Density	65±3g/m <sup>2</sup>	65±3g/m <sup>2</sup>	75±3g/m <sup>2</sup>	90g±3g/m <sup>2</sup>
坯布重量	Raw fabric	45g/m <sup>2</sup>	45g/m <sup>2</sup>	55g/m <sup>2</sup>	70g/m <sup>2</sup>
胶水品种	Latex type	Pressure-sensitive Adhesive, Acrylic type 丙烯酸乳胶+压敏胶			
胶含量	Glue content	30%	30%	30%	30%
含水率	Moisture	≤ 0.5%	≤ 0.5%	≤ 0.5%	≤ 0.5%
抗拉强度	Tensile strength	≥ 400 N / 50mm	≥ 500 N / 50mm	≥ 500 N / 50mm	≥ 500N/50mm

### 包装方式 Packaging



# 家装网 (玻璃纤维网格布) Fiberglass Mesh for Interior Wall

规格Specification			含胶率 Glue content	抗拉强度 Tensile Strength(N/50mm)			织物组织 Weaving type
克重 Weight(g/m <sup>2</sup> )	目数 Mesh count	网孔距 Cell size		经纱 (N)	纬纱 (N)	定位 (N)	
50	8	3X3	18%	> 500	> 500	>1.0	交织 Leno
55	8	3X3	18%	> 500	> 500	>1.0	
55	9	2.85X2.85	18%	> 500	> 500	>1.0	
65	9	2.85X2.85	18%	> 500	> 500	>1.0	
75	12	2X2	18%	> 700	> 700	>1.0	
85	12	2X2	18%	> 700	> 700	>1.0	
70	5	5X5	16%	> 600	> 700	>1.5	
100	5	5X5	15%	> 600	> 700	>2.0	
110	5	5X5	14%	> 700	> 900	>2.0	
125	5	5X5	14%	> 1200	> 1250	>2.5	
160	6	4X4	14%	> 1400	> 1700	>3.5	

注：以上是常规品种，可根据客户不同的要求订制  
Remarks: The above are our regular products. More specifications can be customized.



## 产品介绍:

耐碱玻璃纤维网格布是以玻璃纤维机织物为基材，采用中无碱玻纤纱（主要成分硅酸盐）经特殊的组织结构一纱罗组织绞织而成，再经过涂覆丙烯酸乳液烘干热定型处理，具有良好的抗碱性、柔韧性以及经纬向高度抗拉力。

## 产品特点:

抗碱、耐酸、化学稳定性好；尺寸稳定，定位性佳；强度高、韧性好、抗冲击、重量轻；绝缘、防火、防虫、防霉变；和树脂粘结性强、易溶于苯乙烯等。

## 产品应用:

主要适用于水泥、石膏等墙体，建筑物和其他构筑物内墙面表面增强，抗裂，防裂。

## Introduction:

Fiberglass mesh is a kind of leno-woven textile made by C- glass/ E-glass fiber as the base material, and then coated with acrylic latex. It has good alkali resistance, flexibility and high tensile strength.

## Features:

Alkali-resistant, acid-resistant, good chemical stability, low elongation, excellent fixation, high tensile strength, anti-impact, light-weight, mould-resistant, epoxy compatible, etc.

## Applications:

It is mainly suitable for cement, gypsum and other walls, buildings and other structures to enhance the surface of the inner walls, crack resistance, and crack resistance.



纸箱包装 Cartons Packing

托盘包装 Palletized Packing



散装 Loose Packing

PE塑封 PE Shrunk Packing